



SIRIUS safety relay Output expansion 4RO with relay enabling circuits 4 NO contacts plus Relay signaling circuit 1 NC contact $U_s = 24\text{ V AC}$ screw terminal



product brand name	SIRIUS
product category	Safety relays
product designation	Output expansion
design of the product	Relay enabling circuits
product type designation	3SK1
Product Function	
suitability for use	Yes
• safety-related circuits	Yes
General technical data	
certificate of suitability UL approval	Yes
power loss [W] maximum	2.5 W
insulation voltage rated value	300 V
degree of pollution	3
overvoltage category	3
surge voltage resistance rated value	4 000 V
protection class IP of the enclosure	IP20
shock resistance	10g / 11 ms
vibration resistance according to IEC 60068-2-6	5 ... 500 Hz: 0.75 mm
operating frequency maximum	360 1/h
reference code according to IEC 81346-2	F
Substance Prohibition (Date)	11/05/2012
SVHC substance name	Lead CAS-No. 7439-92-1 Lead monoxide (lead oxide) CAS-No. 1317-36-8
Net Weight	0.231 kg
Ambient conditions	
installation altitude at height above sea level maximum	4 000 m
• note	Derating, see Product Notification 109792701
ambient temperature	
• during operation	-25 ... +60 °C
• during storage	-40 ... +80 °C
relative humidity during operation	10 ... 95 %
air pressure according to SN 31205	900 ... 1 060 hPa
Electromagnetic compatibility	
installation environment regarding EMC	This product is suitable for Class B environments and can also be used in domestic environments.
EMC emitted interference	IEC 60947-5-1, Class B
Safety related data	
product function suitable for safety function	Yes
safe state	Safety outputs switched off

test wear-related service life necessary	Yes
function test interval maximum	1 a
stop category according to IEC 60204-1	0
proportion of dangerous failures with low demand rate according to SN 31920	15 %
failure rate [FIT] with low demand rate according to SN 31920	130 FIT
IEC 62061	
SIL Claim Limit (subsystem) according to EN 62061	3
Safety Integrity Level (SIL)	
• according to IEC 62061	SIL 3
PFHD with high demand rate according to IEC 62061	0 1/h
ISO 13849	
category according to EN ISO 13849-1	4
performance level (PL)	
• according to ISO 13849-1	PL e
category	
• according to ISO 13849-1	4
device type according to ISO 13849-1	1
overdimensioning according to ISO 13849-2 necessary	No
IEC 61508	
Safety Integrity Level (SIL)	
• according to IEC 61508	3
safety device type according to IEC 61508-2	Type A
PFHD with high demand rate according to IEC 61508	0 1/h
Average probability of failure on demand (PFDavg) with low demand rate acc. to IEC 61508	1E-6 1/y
PFDavg with low demand rate according to IEC 61508	1E-6
Safe failure fraction (SFF)	99 %
hardware fault tolerance	
• according to IEC 61508	1
T1 value	
• of service life according to IEC 61508	20 a
• for proof test interval or service life according to IEC 61508	20 a
Electrical Safety	
touch protection against electrical shock	finger-safe
Short-circuit protection	
design of the fuse link for short-circuit protection of the NO contacts of the relay outputs required	gL/gG: 6A or circuit breaker type A: 3A or circuit breaker type B: 2A or circuit breaker type C: 1A
Inputs	
design of input	
• feedback input	No
Outputs	
number of outputs as contact-affected switching element	
• as NC contact	
— for signaling function delayed switching	0
— safety-related instantaneous contact	0
— safety-related delayed switching	0
• as NO contact	
— for signaling function instantaneous contact	0
— for signaling function delayed switching	0
— safety-related instantaneous contact	4
— safety-related delayed switching	0
mechanical service life (operating cycles) typical	10 000 000
thermal current of the switching element with contacts maximum	5 A
number of outputs as contact-less semiconductor switching element	
• for signaling function	
— delayed switching	0

switching capacity current of the NO contacts of the relay outputs at DC-13		
<ul style="list-style-type: none"> • at 24 V • at 115 V • at 230 V 	5 A 0.2 A 0.1 A	
switching capacity current of the NO contacts of the relay outputs at AC-15		
<ul style="list-style-type: none"> • at 24 V • at 115 V • at 230 V 	5 A 5 A 5 A	
total current maximum	12 A	
operational current at 17 V minimum	5 mA	
Times		
make time with automatic start		
<ul style="list-style-type: none"> • typical • at AC maximum 	25 ms 40 ms	
make time with automatic start after power failure		
<ul style="list-style-type: none"> • typical • maximum 	25 ms 40 ms	
backslide delay time in the event of power failure		
<ul style="list-style-type: none"> • typical • maximum 	45 ms 50 ms	
recovery time after power failure typical	0.06 s	
Control circuit/ Control		
type of voltage of the control supply voltage	AC	
control supply voltage at AC		
<ul style="list-style-type: none"> • at 50 Hz rated value • at 60 Hz rated value 	24 V 24 V	
control supply voltage frequency		
<ul style="list-style-type: none"> • 1 rated value • 2 rated value 	50 Hz 60 Hz	
operating range factor control supply voltage rated value of magnet coil at AC		
<ul style="list-style-type: none"> • at 50 Hz • at 60 Hz 	0.85 ... 1.1 0.85 ... 1.1	
ON-delay time		
<ul style="list-style-type: none"> • at AC maximum 	40 ms	
OFF-delay time maximum	50 ms	
Installation/ mounting/ dimensions		
mounting position	any	
fastening method	screw and snap-on mounting	
height	100 mm	
width	22.5 mm	
depth	121.6 mm	
required spacing		
<ul style="list-style-type: none"> • with side-by-side mounting at the side • for grounded parts at the side 	0 mm 5 mm	
Connections/ Terminals		
type of electrical connection	screw terminal	
type of connectable conductor cross-sections		
<ul style="list-style-type: none"> • solid • finely stranded with core end processing • for AWG cables solid 	1x (0.5 ... 2.5 mm ²), 2x (1.0 ... 1.5 mm ²) 1x (0.5 ... 2.5 mm ²), 2x (0.5 ... 1.0 mm ²) 1x (20 ... 14), 2x (18 ... 16)	
type of electrical connection plug-in socket	No	
Approvals Certificates		
Environment	General Product Approval	EMV

[Environmental Con-
firmations](#)



EMV	Functional Safety	Test Certificates	other		Railway
	Type Examination Certificate	Type Test Certificates/Test Report		Confirmation	Confirmation

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SK1211-1BB00>

Cax online generator


<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SK1211-1BB00>





Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3SK1211-1BB00>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SK1211-1BB00&lang=en

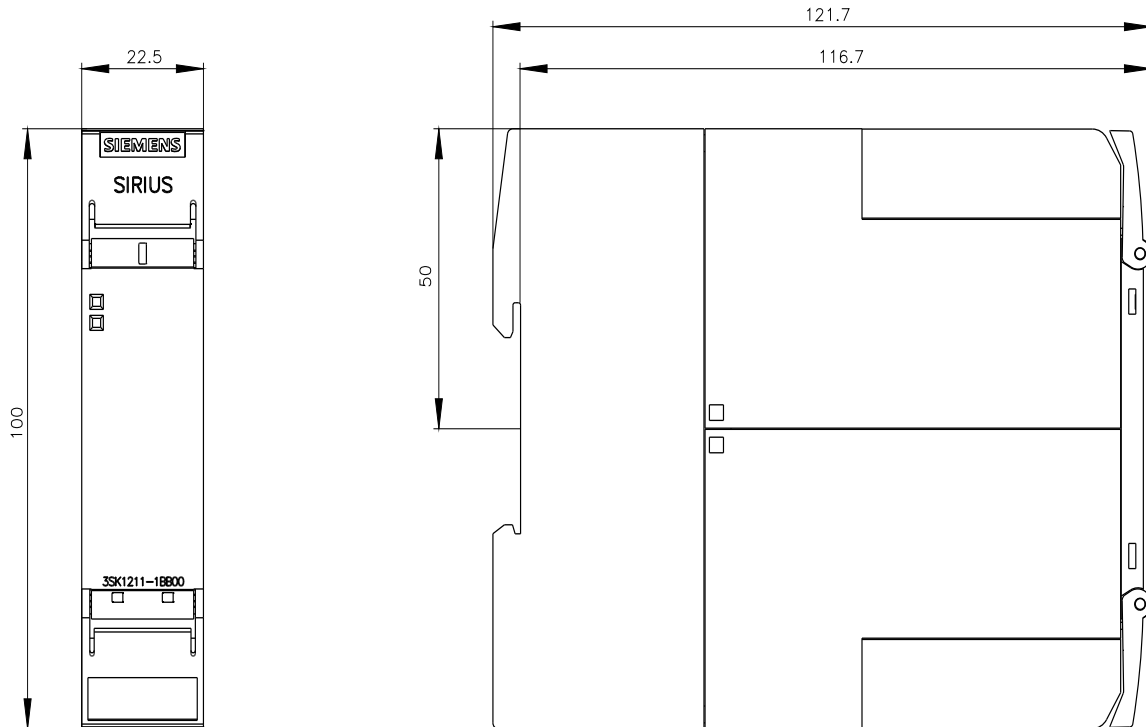

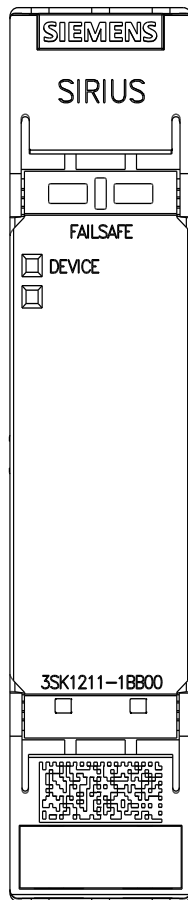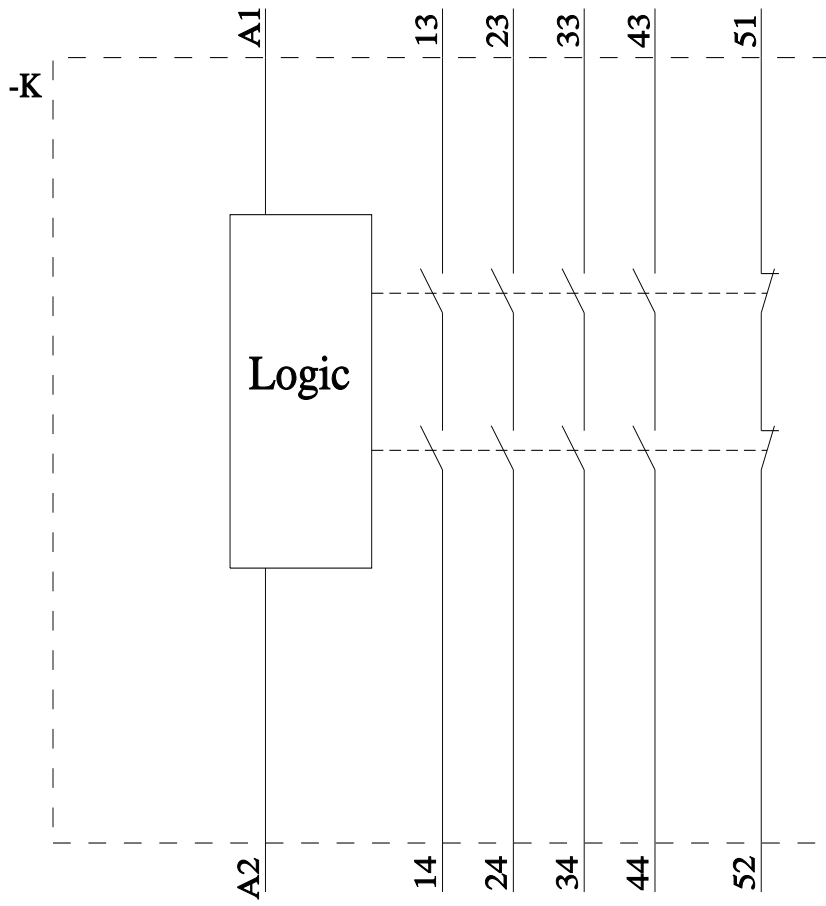

last modified:

2/4/2026